No.1 Share in Japan

ORION®

ISO Quality Policy
Orion strives to offer products that delight its customers.

オリオンクリーンエアシステム
冷凍式圧縮空気除湿装置

Clean Air System

Low Pressure Loss & Energy Saving

Eco-Friendly Refrigerant Applied

Powerful performance in Asia with heavy duty specification

Best Match for Inverter Compressor & Oil-Free Compressor

ORION Refrigerated Air Dryer

Feature-Packed Air Dryer for Energy Saving and Stable Productivity,

ORION ARX series

ARX120K

All-in-One SUS Shell Heat Exchanger
Primary and secondary heat exchangers are integrated in a single SUS shell and rust proof SUS shell maintains minimal pressure loss for long time.

ARX model
P-Loss under 0.015MPa

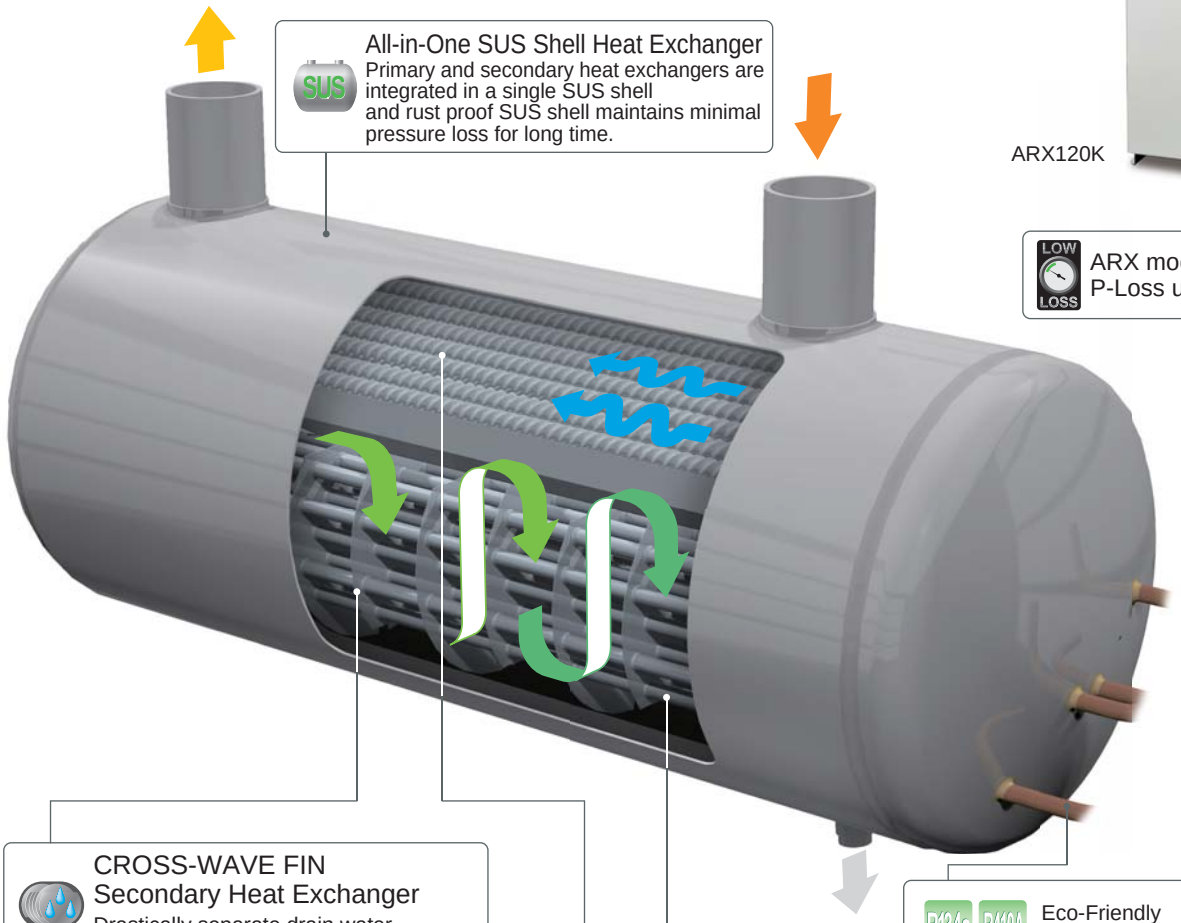

CROSS-WAVE FIN Secondary Heat Exchanger
Drastically separate drain water from compressed air without pressure loss

TURBO TUBE Primary Heat Exchanger
Efficient pre-cooling and re-heating without pressure loss

Eco-Friendly refrigerant applied

Heavy Duty Refrigerant Circuit
Durable performance in severe condition at ambient temp. of 43℃

ARX Pressure Loss Advantage

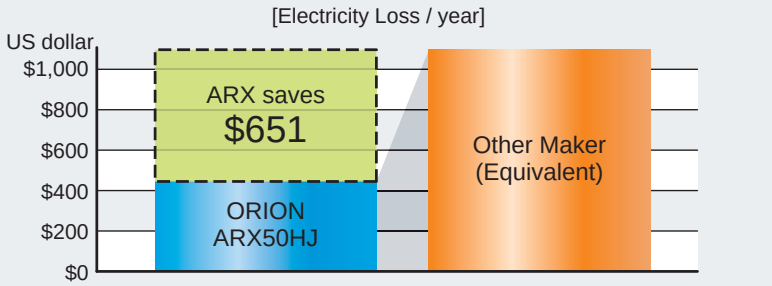

	ORION ARX50HJ	Other Maker (Equivalent)	Difference
Pressure Loss	0.013MPa	0.032MPa	0.019MPa
Electricity Loss/year	$446	$1,097	$651

Compressor	Air Pressure Source	Capacity	Electricity Charge	Running Hour
37kW(50HP)	0.69MPa	7m³/min	US$0.15/kWh	8000h

NICKEL-PLATED Copper Pipe
Anti-corrosion and prevention gas leakage

NICKEL-PLATED Copper Pipe

Copper pipe not plated

Condenser Filter
Protection against dust and easy maintenance

ARX Function Chart

High inlet air temperature model

Function	Model : ARX									
	3HJ	5HJ	10HJ	20HJ	30HJ	50HJ	75HJ	90HK	100HK	120HK
All-in-One SUS Shell Heat Exchanger		●	●	●	●	●	●	●	●	●
SUS Shell Heat Exchanger	●									
TURBO TUBE Primary Heat Exchanger	●	●	●	●	●	●	●	●	●	●
CROSS-WAVE FIN Secondary Heat Exchanger	●	●	●	●	●	●	●	●	●	●
NICKEL-PLATED Copper Pipe			●	●	●	●	●	●	●	●
R134a / R410A Refrigerant	●	●	●	●	●	●	●	●	●	●
Heavy Duty Refrigerant Circuit	●	●	●	●	●	●	●	●	●	●
Condenser Filter		●	●	●	●	●	●	●	●	●
Wide Adjusting Range CCV (capacity control valve)	●	●	●	●	●	●	●	●	●	●
Operation Lamp	●	●	●	●	●	●	●	●	●	●
Alarm Lamp								●	●	●
Evaporating Pressure Gauge		●	●	●	●	●	●	●	●	●
Air Pressure Gauge			●	●	●	●	●	●	●	●
Long Life Fan-Control Switch	●	●	●	●	●	●	●	●	●	●
One Touch Open Front Cabinet	●	●	●	●	●	●	●	●	●	●
3 Signal Outputs (remote, operation status, alarm)	Option							●	●	●
Exhaust Duct								Option		
Float Operated Auto Drain Trap FD6 with Ball Valve					●	●	●	●	●	
Float Operated Auto Drain Trap FD2 with Ball Valve		●	●	●						
Float Operated Auto Drain Trap FD2	●									
Disc Operated Auto Drain Trap AD-5 with Ball Valve										●

Standard inlet air temperature model

Function	Model : ARX									
	5J	10J	20J	30J	50J	75J	100J	110K	120K	180K
All-in-One SUS Shell Heat Exchanger		●	●	●	●	●	●	●	●	●
SUS Shell Heat Exchanger	●									
TURBO TUBE Primary Heat Exchanger	●	●	●	●	●	●	●	●	●	●
CROSS-WAVE FIN Secondary Heat Exchanger	●	●	●	●	●	●	●	●	●	●
NICKEL-PLATED Copper Pipe			●	●	●	●	●	●	●	●
R134a / R410A Refrigerant	●	●	●	●	●	●	●	●	●	●
Heavy Duty Refrigerant Circuit	●	●	●	●	●	●	●	●	●	●
Condenser Filter		●	●	●	●	●	●	●	●	●
Wide Adjusting Range CCV (capacity control valve)	●	●	●	●	●	●	●	●	●	●
Operation Lamp	●	●	●	●	●	●	●	●	●	●
Alarm Lamp								●	●	●
Evaporating Pressure Gauge		●	●	●	●	●	●	●	●	●
Air Pressure Gauge			●	●	●	●	●	●	●	●
Long Life Fan-Control Switch	●	●	●	●	●	●	●	●	●	●
One Touch Open Front Cabinet	●	●	●	●	●	●	●	●	●	●
3 Signal Outputs (remote, operation status, alarm)	Option							●	●	●
Exhaust Duct								Option		
Float Operated Auto Drain Trap FD6 with Ball Valve					●	●	●	●	●	
Float Operated Auto Drain Trap FD2 with Ball Valve		●	●	●						
Float Operated Auto Drain Trap FD2	●									
Disc Operated Auto Drain Trap AD-5 with Ball Valve										●

ORION Clean Air Filter

Advanced Technology Packed Clean Air Filter,ORION “AL-Filter” series

Drain Filter DSF-AL

Location※1 Before ARX



Sectioned Drawing of Element

Water droplet and solid particulate (5μm) removal
No water drop in filtration performance
Low pressure loss (0.005MPa or less) as pre-Filter
Float operated auto drain trap installed

LOW LOSS **P-loss 0.005MPa**

Performance Curve

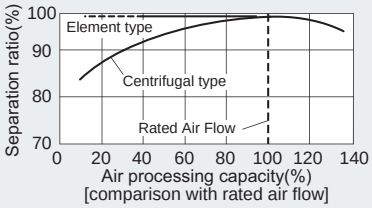

Line Filter LSF-AL

Location※1 After ARX



Sectioned Drawing of Element

Solid particulate (1μm, 99.999%) removal
High quality glass fiber element installed(ELS)
Float operated auto drain trap installed
Precision different pressure gauge "DG-50(A)" installed (LSF400AL and bigger model)

LOW LOSS **P-loss 0.005MPa (Initial)**

High Quality Glass Fiber



Mist Filter MSF-AL

Location※1 After LSF-AL



Sectioned Drawing of Element

Oil mist (0.01wt ppm) and fine solid particulate (0.01μm, 99.999%) removal
Newly developed element installed(EMS)
Float operated auto drain trap installed
Precision different pressure gauge "DG-50(A)" installed (MSF400AL and bigger model)

LOW LOSS **P-loss 0.01 ～ 0.02MPa**

Oil-Resistant Plastic Form



High Quality Glass Fiber

Carbon Filter KSF-AL

Location※1 After MSF-AL



Sectioned Drawing of Element

Removes Odor (0.003wt ppm) .
Newly developed element "Fibrous Activated Carbon" installed(EKS)
Great reduction in amount of loose carbon as compared with previous filters

LOW LOSS **P-loss 0.009MPa**

Output Oil Concentration(wt ppm)

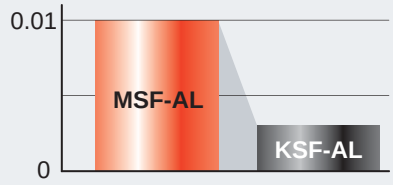

All AL-Filter are alumite-treated on the inside surface.

※1 : Please refer to Basic System Example catalog on page 4

Basic System Examples

Air Quality Notes

Please install ORION genuine Clean Air Filters 'before and after ARX dryer' for the best performance.

Safety Notes

Before operating equipment, please read the operating manual carefully, and only use as indicated.
For installation of equipment and required wiring, employ a qualified person or consult with your dealer.
Be sure to select equipment which suits your needs. Do not use equipment for purposes other than intended.
Doing so can lead to accidents or equipment breakdown.

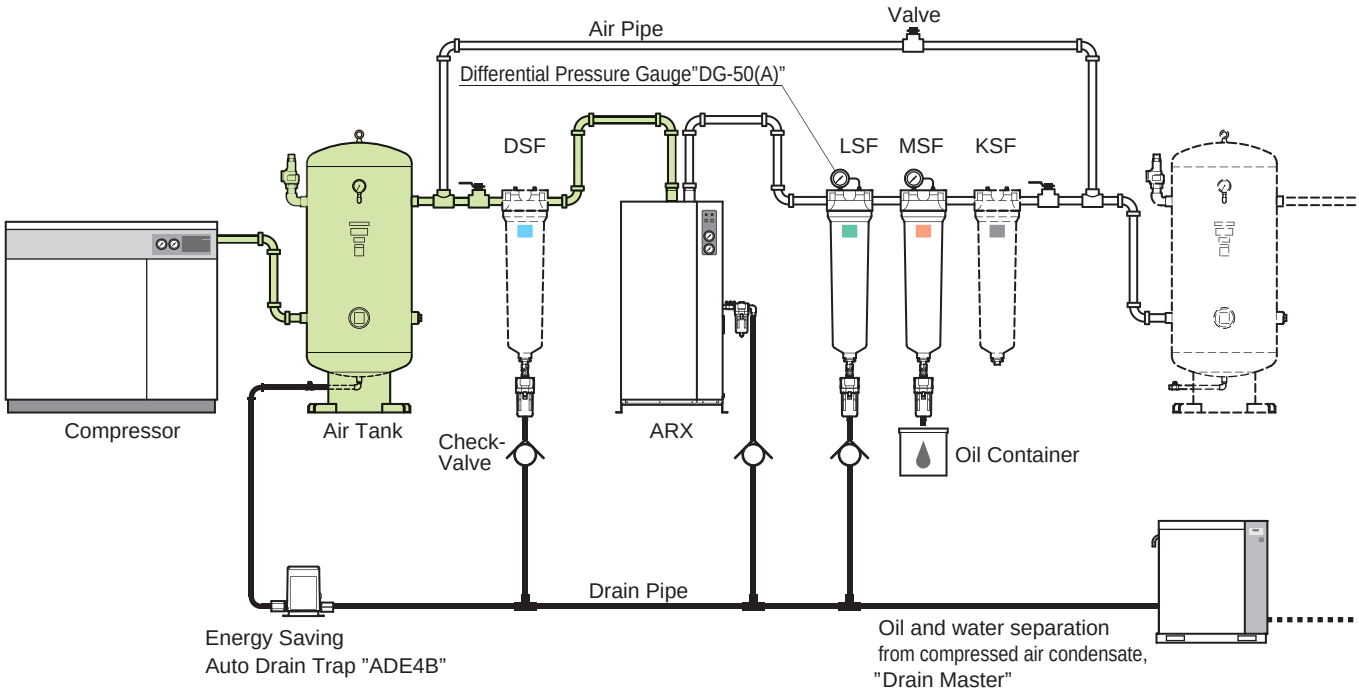

System	Applications
★☆ DSF ARX LSF MSF KSF	General Painting, Precision Machinery Industry, etc
☆ DSF ARX LSF MSF	Standard Pneumatic
ARX LSF MSF	Standard Pneumatic
⚠ LSF ARX MSF	⚠ Not recommended

1) Please consult with your dealer or ORION directly for further information when compressed air is supplied for medical, food, or clean room use.
2) Please set up above ☆system when Oil-Free compressor is installed.
3) Please set up above ★system when intake air of an air compressor includes large amount of oil droplets.
4) ⚠ LSF-AL is not recommended to be installed before ARX dryers because it will increase differential pressure and drain water will be accumulated in the differential pressure gauge.
5) Please refer to "Compressed Clean Air catalog" (D-AG02) for details of "DRAIN MASTER" series.
6) SUS pipe and SUS air tank are recommended when Oil-Free compressor is installed (as indicated in Green). ARX Heat-Exchanger is made of SUS
7) Please install a check valve on exhaust pipe of filter.
8) Please consult with your dealer or ORION directly when you are not certain of air tank location (before or after ARX).

Specifications Refrigerated Air Dryer

ARX Series

ARX5J ARX20J

ARX120K

ARX180K

Refrigerated Air Dryer : High inlet air temp. model

Descriptions		Type	ARX									
			3HJ	5HJ	10HJ	20HJ	30HJ	50HJ	75HJ	90HK	100HK	120HK
Air Processing Capacity		m³/min	0.32	0.7	1.1	2.8	4.6	7.6	8.8	10.7	14.9	18.4
Inlet Air Temperature		℃	10~80									
Dew Point Temperature		℃	3~15									
Ambient Temperature		℃	2~43									
Operating Pressure		MPa	0.2~0.98									
Dimensions	Height	mm	480	510	610		900	990	1050	1054	1229	1275
	Depth	mm	450	600	820		960	980	1010	1022	1023	1291
	Width	mm	180	240	240		300		380	470	592	702
Mass		kg	18	26	35	44	83	94	106	140	167	233
Pipe Connections		B	R1/2	R3/4	R1		R1 1/2		R2			R2 1/2
Power Source (50Hz)		V	1ph220±10%							3ph380V±10%		
Power Consumption (50Hz)		kW	0.27	0.28	0.37	0.74	1.9	2.0		3.7	3.8	4.8
Refrigerant			R134a			R410A						

Rated Condition			
Air Pressure	Ambient Temp.	Dew Ponit (PDP)	Inlet Air Temp.
0.69MPa	35℃	10℃	50℃

Refrigerated Air Dryer : Standard inlet air temp. model

Descriptions		Type	ARX									
			5J	10J	20J	30J	50J	75J	100J	110K	120K	180K
Air Processing Capacity		m³/min	0.54	1.0	2.3	4.0	6.4	9.0	12.0	13.0	19.0	26.0
Inlet Air Temperature		℃	10~50									
Dew Point Temperature		℃	3~15									
Ambient Temperature		℃	2~43									
Operating Pressure		MPa	0.2~0.98									
Dimensions	Height	mm	480	510	610		900	990	1050	1054	1229	1275
	Depth	mm	450	600	820		960	980	1010	1022	1023	1291
	Width	mm	180	240	240		300		380	470	592	702
Mass		kg	18	26	35	44	83	94	106	140	167	233
Pipe Connections		B	R1/2	R3/4	R1		R1 1/2		R2			R2 1/2
Power Source (50Hz)		V	1ph220±10%							3ph380V±10%		
Power Consumption (50Hz)		kW	0.26	0.27	0.36	0.68	1.7			3.3	3.4	5.0
Refrigerant			R134a			R410A						

Rated Condition			
Air Pressure	Ambient Temp.	Dew Ponit (PDP)	Inlet Air Temp.
0.69MPa	30℃	10℃	35℃

LSF400-AL MSF400-AL

Specifications Clean Air Filter

DSF-AL / LSF-AL / MSF-AL / KSF-AL Series

Descriptions			Type DSF/LSF/MSF/KSF	75-AL ※1	150-AL	200-AL	250-AL	400-AL	700-AL	1000-AL	1300-AL1 ※4	2000-AL1 ※4
Air Processing Capacity ※2	0.69MPa		m³/min	0.35	1.2	1.8	2.7	3.9	6.6	10.6	13.8	20.0
	0.75MPa			0.38	1.3	2.0	2.9	4.2	7.2	11.5	15.0	21.7
	0.85MPa			0.42	1.5	2.2	3.3	4.7	8.0	12.9	16.8	24.3
Casing Material				Aluminum Die Casting (All AL-Filter are alumite-treated on the inside surface.)								
Operating Range	Fluid			Compressed Air								
	Inlet Air Pressure		MPa	0.05~0.98 (DSF / LSF / MSF 1300AL1, 2000AL1 : 0.1~0.98)								
	Inlet Air Temperature		℃	5~60								
	Ambient Temperature		℃	2~60								
Performance ※3	Filtration			DSF : 5μm and Water Separation Efficiency 99% / LSF :1μm (Filtration Efficiency 99.999%) MSF : 0.01μm (Filtration Efficiency 99.999%) / KSF : Adsorption								
	Outlet Oil Contamination		wt ppm	MSF : 0.01 / KSF : 0.003								
	Pressure Loss		MPa	DSF :Initial 0.005 / LSF :Initial 0.005 / MSF : Initial : 0.01・Usual 0.02 / KSF : 0.009								
When to replace filter element				One year or pressure loss 0.02 MPa for DSF, 0.035 MPa for LSF/MSF, whichever comes first.								
Connections	Pipe Connections			Rc3/8	Rc1/2	Rc3/4	Rc1		Rc1 1/2		Rc2	
	Different Pressure Gauge Connection			Rc1/4								
Mass			kg	1.0		2.0	2.1	2.6	5.0	6.0	6.5	9.0
Accessories	Filter Element	Type	EDS/ELS EMS/EKS	75	150	200	250	400	700	1000	1300	2000
		Q'ty		1 each								
	Auto Drain Trap		LSF/MFS DSF	NH-503MR built-in, none with KSF							FD2, none with KSF	
	Differential Pressure Gauge			Option				DG-50(A)(LSF・MSF Equipped) / DSF・KSF Option				

※1. KSF available from 150 to 2000. ※2. Air Processing Capacity is converted to the suction air condition (atmospheric, 32℃, 75%RH).
※3. All Performances are tested at standard Air Processing Capacity (0.69MPa), Inlet oil contamination 3 wt ppm(LSF/MSF), 0.01wt ppm(KSF)
※4. Model name of KSF is "KSF1300-AL" and "KSF2000-AL".
※5. Oil concentration is measured in conformity with ISO8573-2 "Compressed air - Part 2 : Test methods for oil aerosol content" , not including oil-vapor.

Auto Drain Trap

Item			Float operated			Disc operated
			FD2-G3	FD6-G1	FD-10-A	AD-5-G7
Maximum drain flow capacity ※1			10 cm³/ cycle	30 cm³/ cycle	80 cm³/ cycle	450 L / h
Operable pressure range		MPa	0.1 ～ 1.0		0.20 ～ 0.98	0.29 ～ 0.98
Operable temperature range		℃	2 ～ 60			
Processed fluid			Compressed air drain			
Drain release method			Float operated			Disc operated
Connections	Inlet		Rc 1/2			1/2
	Drain outlet		ID ϕ5.7 ～ 6.0 OD ϕ8		Rc 3/8	Rc 1/2
Mass		kg	0.3	0.45	1	1.7
Outside dimensions		mm	Outside diameter: 63 × length: 178	Outside diameter: 80 × length: 201	Outside diameter: 96 × length: 193	Outside diameter: 86 × length: 198

※1. Drain conditions: Air pressure (gauge pressure): 0.69MPa.
※Indoor specifications (Operable in environment where it would not be exposed to water splash.)
※When setting up drain piping, to prevent back pressure from other traps, be sure to install a check valve. Also install drain traps at each drain port. (Please refer to detail on page 4)
※Please consult your Orion dealer for further details.

Differential Pressure Gauge

DG-50(A)

ORION
Clean Air System

Model Selection For ARX Series

Model Selection

1 Temperature conditions
Table A : ARX-HJ/HK Models
Table B : ARX-J/K Models
Table C : Air Pressure Coefficient

2 Calculate the necessary air capacity for the model selection.
Air capacity required =
Intake air volume / (A or B × C)

3 Please select the suitable model from the specification which has bigger Air Processing Capacity (P5) than the air capacity required.

Model selection Example

Inlet Air Temp.	60℃	Ambient Temp.	35℃	Air Flow	6m³/min
PDP	10℃	Air Pressure	0.59MPa	Frequency	50Hz

1 From charts, Inlet temp. coefficient → **0.70**
Air Pressure coefficient → **0.93**

2 Air capacity required for Orion Dryer,
6 / (0.70×0.93)=9.2m³/min

3 The suitable model to process 9.2m³/min is ARX90HK, as its capacity exceeds the required value.

A: Inlet Air Temperature Coefficient (ARX-HJ/HK Models)

Inlet air temperature(℃)		50			60			70			80		
Outlet dew point (℃) ※		5	10	15	5	10	15	5	10	15	5	10	15
Ambient temperature(℃)	30	0.78	1.06	1.27	0.62	0.80	0.92	0.53	0.68	0.82	0.48	0.63	0.79
	35	0.73	1.00	1.21	0.57	0.70	0.86	0.47	0.60	0.74	0.41	0.57	0.71
	40	0.55	0.75	0.91	0.44	0.56	0.66	0.37	0.46	0.55	0.33	0.42	0.51

※Please ask to your dealer about coefficient at dew point 3℃

B: Inlet Air Temperature Coefficient (ARX-J/K Models)

Inlet air temperature(℃)		35			40			45			50		
Outlet dew point (℃) ※		5	10	15	5	10	15	5	10	15	5	10	15
Ambient temperature(℃)	25	0.87	1.10	1.31	0.72	0.86	1.05	0.60	0.72	0.86	0.55	0.69	0.76
	30	0.80	1.00	1.20	0.66	0.79	0.96	0.55	0.66	0.79	0.50	0.63	0.70
	35	0.78	0.94	1.15	0.63	0.74	0.92	0.51	0.62	0.74	0.46	0.57	0.65
	40	0.73	0.88	1.08	0.58	0.65	0.86	0.47	0.56	0.68	0.40	0.51	0.58

※Please ask to your dealer about coefficient at dew point 3℃

C: Air Pressure Coefficient

Air Pressure MPa	0.20	0.29	0.39	0.49	0.59	0.69	0.78	0.88	0.93	0.98
Coefficient	0.67	0.73	0.80	0.87	0.93	1.00	1.07	1.13	1.16	1.20

ISO Certification

Orion Machinery Asia Co., Ltd is an ISO Certified, Quality Management company.

For inquiries, please contact the following representative:

ORION MACHINERY ASIA CO., LTD.
33 / 3 Moo 5 Sambundid, U-Thai,
Ayutthaya 13210, Thailand
TEL : +66-35-246-828 / FAX : +66-35-246-829

Important:
This catalog contains product specifications as of Jul., 2016.
- Images in this catalog are printed images and actual product colors may differ from the colors herein.
- Product mechanisms, specifications, etc. listed in this catalog are subject to change without notice.
- Designed by Orion Machinery Japan. Assembled in Thailand.

K No.2062 16.07.06 pdf DG